



SIL-AIR

SIL-AIR 200/100



200 l/min - 7.06 CFM

8 bar - 116 psi

- Modello con 4 motori
- Model with 4 motors
- Modèle avec 4 moteurs
- Modell mit 4 Verdichtern
- Modelo con 4 motores


SIL-AIR 200/100 V

- Modello con ventole di raffreddamento
- Model with cooling fans
- Modèle avec ventilateurs de refroidissement
- Modell mit Kühlventilatoren
- Modelo con ventiladores de enfriamiento


Volt/Hz	l/min (CFM) *	l (Gal.)	Watt	dBA	Kg (Lbs)	Kg (Lbs)
230/50	148 (5.2)	100 (26.4)	1360	44	95 (209)	125 (276)
115/60	176 (6.2)		1600			

* = @ 5 bar (72.5 PSI)

	A mm	B mm	C mm
	340	1120	730
	770	1470	1060

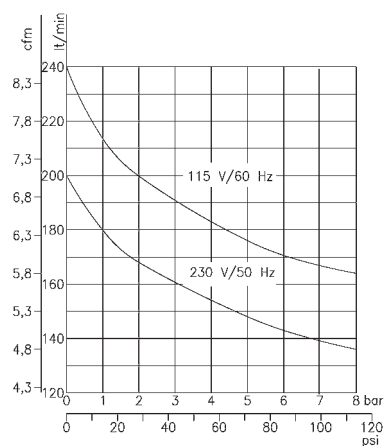

OPZIONI / OPTIONALS / OPTIONS / SONDERZUBEHÖR / OPCIONES

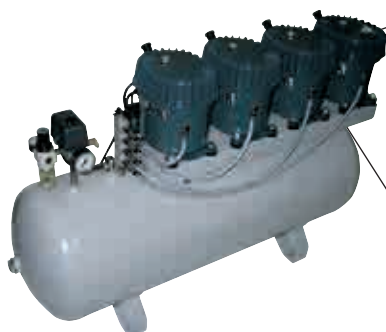

SIL-AIR 200/100 AL

- Motori con coperchi alettati
- Motors with cooling heads
- Moteurs avec couvercles à ailettes
- Motoren mit Kühlrippen
- Motores con cabezas aletadas